


Fittings with short Spigot

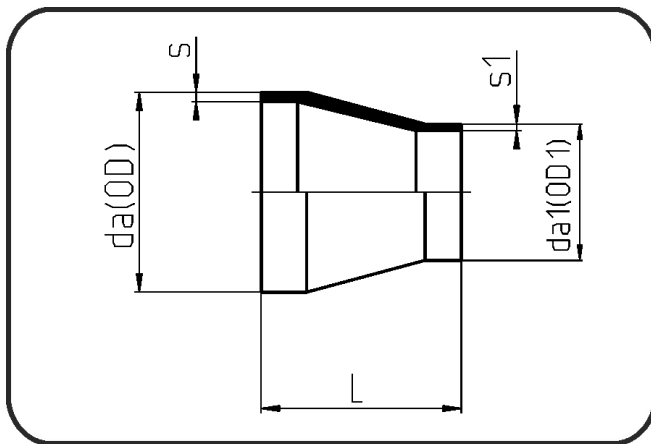

Code: 317

- Reducer concentric
- short spigot
- machined
- Butt-welding
- PE 100-RC black

Dimension	Code	Detail	da(OD) mm	da1(OD1) mm	s mm	L mm	s1 mm	Weight
75/63	70.317.7563.09	75/63 SDR9 ISO S-4	75	63	8,4	65	7,1	0.12
90/63	70.317.9063.09	90/63 SDR9 ISO S-4	90	63	10,1	75	7,1	0.16
90/75	70.317.9075.09	90/75 SDR9 ISO S-4	90	75	10,1	70	8,4	0.17
110/75	70.317.1175.09	110/75 SDR9 ISO S-4	110	75	12,3	80	8,4	0.29
125/75	70.317.1275.09	125/75 SDR9 ISO S-4	125	75	14	85	8,4	0.54
140/75	70.317.1475.09	140/75 SDR9 ISO S-4	140	75	15,7	95	8,4	0.61
140/90	70.317.1490.09	140/90 SDR9 ISO S-4	140	90	15,7	90	10,1	0.63
140/110	70.317.1411.09	140/110 SDR9 ISO S-4	140	110	15,7	85	12,3	0.59
140/125	70.317.1412.09	140/125 SDR9 ISO S-4	140	125	15,7	115	14	0.57
160/140	70.317.1614.09	160/140 SDR9 ISO S-4	160	140	17,9	125	15,7	0.87
180/90	70.317.1890.09	180/90 SDR9 ISO S-4	180	90	20,1	140	10,1	1.35
180/110	70.317.1811.09	180/110 SDR9 ISO S-4	180	110	20,1	135	12,3	1.40
180/125	70.317.1812.09	180/125 SDR9 ISO S-4	180	125	20,1	130	14	1.05
180/140	70.317.1814.09	180/140 SDR9 ISO S-4	180	140	20,1	130	15,7	1.38
180/160	70.317.1816.09	180/160 SDR9 ISO S-4	180	160	20,1	125	17,9	1.32
200/140	70.317.2014.09	200/140 SDR9 ISO S-4	200	140	22,4	145	15,7	1.44
200/180	70.317.2018.09	200/180 SDR9 ISO S-4	200	180	22,4	140	20,1	1.86
225/140	70.317.2214.09	225/140 SDR9 ISO S-4	225	140	25,2	110	15,7	2.15
225/180	70.317.2218.09	225/180 SDR9 ISO S-4	225	180	25,2	145	20,1	3.10
225/200	70.317.2220.09	225/200 SDR9 ISO S-4	225	200	25,2	90	22,4	1.87
250/180	70.317.2518.09	250/180 SDR9 ISO S-4	250	180	27,9	110	20,1	5.00
250/200	70.317.2520.09	250/200 SDR9 ISO S-4	250	200	27,9	100	22,4	3.60
280/160	70.317.2816.09	280/160 SDR9 ISO S-4	280	160	31,3	125	17,9	3.50
280/180	70.317.2818.09	280/180 SDR9 ISO S-4	280	180	31,3	120	20,1	7.00
280/200	70.317.2820.09	280/200 SDR9 ISO S-4	280	200	31,3	115	22,4	3.80
280/225	70.317.2822.09	280/225 SDR9 ISO S-4	280	225	31,3	105	25,5	4.60
280/250	70.317.2825.09	280/250 SDR9 ISO S-4	280	250	31,3	100	27,9	4.30
315/160	70.317.3116.09	315/160 SDR9 ISO S-4	315	160	35,2	140	17,9	4.98

Dimension	Code	Detail	da(OD) mm	da1(OD1) mm	s mm	L mm	s1 mm	Weight
315/180	70.317.3118.09	315/180 SDR9 ISO S-4	315	180	35,2	135	20,1	4.60
315/200	70.317.3120.09	315/200 SDR9 ISO S-4	315	200	35,2	125	22,4	5.23
315/225	70.317.3122.09	315/225 SDR9 ISO S-4	315	225	35,2	120	25,5	5.20
315/250	70.317.3125.09	315/250 SDR9 ISO S-4	315	250	35,2	115	27,9	5.80
315/280	70.317.3128.09	315/280 SDR9 ISO S-4	315	280	35,2	105	31,3	6.00
355/180	70.317.3518.09	355/180 SDR9 ISO S-4	355	180	39,7	155	20,1	8.00
355/200	70.317.3520.09	355/200 SDR9 ISO S-4	355	200	39,7	150	22,4	9.00
355/225	70.317.3522.09	355/225 SDR9 ISO S-4	355	225	39,7	140	25,5	8.60
355/250	70.317.3525.09	355/250 SDR9 ISO S-4	355	250	39,7	130	27,9	8.80
355/280	70.317.3528.09	355/280 SDR9 ISO S-4	355	280	39,7	125	31,3	9.20
355/315	70.317.3531.09	355/315 SDR9 ISO S-4	355	315	39,7	115	35,2	7.00
400/180	70.317.4018.09	400/180 SDR9 ISO S-4	400	180	44,7	170	20,1	9.60
400/225	70.317.4022.09	400/225 SDR9 ISO S-4	400	225	44,7	160	25,5	8.80
400/250	70.317.4025.09	400/250 SDR9 ISO S-4	400	250	44,7	150	27,9	10.40
400/280	70.317.4028.09	400/280 SDR9 ISO S-4	400	280	44,7	140	31,3	10.80
400/315	70.317.4031.09	400/315 SDR9 ISO S-4	400	315	44,7	130	35,2	9.00
400/355	70.317.4035.09	400/355 SDR9 ISO S-4	400	355	44,7	120	39,7	8.80
450/225	70.317.4522.09	450/225 SDR9 ISO S-4	450	225	50,3	180	25,5	14.00
450/250	70.317.4525.09	450/250 SDR9 ISO S-4	450	250	50,3	170	27,9	7.07
450/280	70.317.4528.09	450/280 SDR9 ISO S-4	450	280	50,3	160	31,3	14.80
450/315	70.317.4531.09	450/315 SDR9 ISO S-4	450	315	50,3	150	35,2	14.20
450/355	70.317.4535.09	450/355 SDR9 ISO S-4	450	355	50,3	140	39,7	16.00
450/400	70.317.4540.09	450/400 SDR9 ISO S-4	450	400	50,3	125	44,7	16.50
500/315	70.317.5031.09	500/315 SDR9 ISO S-4	500	315	55,8	175	35,2	17.40
500/355	70.317.5035.09	500/355 SDR9 ISO S-4	500	355	55,8	165	39,7	17.40
500/400	70.317.5040.09	500/400 SDR9 ISO S-4	500	400	55,8	150	44,7	18.00
500/450	70.317.5045.09	500/450 SDR9 ISO S-4	500	450	55,8	250	50,3	21.00
560/315	70.317.5631.09	560/315 SDR9 ISO S-4	560	315	62,5	250	36,2	21.00
560/355	70.317.5635.09	560/355 SDR9 ISO S-4	560	355	62,5	250	39,7	23.00
560/400	70.317.5640.09	560/400 SDR9 ISO S-4	560	400	62,5	250	44,7	25.00
560/450	70.317.5645.09	560/450 SDR9 ISO S-4	560	450	62,5	250	50,3	27.00
560/500	70.317.5650.09	560/500 SDR9 ISO S-4	560	500	62,5	250	55,8	29.00
630/355	70.317.6335.09	630/355 SDR9 ISO S-4	630	355	70,3	250	39,7	30.00
630/400	70.317.6340.09	630/400 SDR9 ISO S-4	630	400	70,3	250	44,7	32.00
630/450	70.317.6345.09	630/450 SDR9 ISO S-4	630	450	70,3	250	50,3	34.00
630/500	70.317.6350.09	630/500 SDR9 ISO S-4	630	500	70,3	250	55,8	36.00
630/560	70.317.6356.09	630/560 SDR9 ISO S-4	630	560	70,3	250	62,5	38.50