


## Pipes

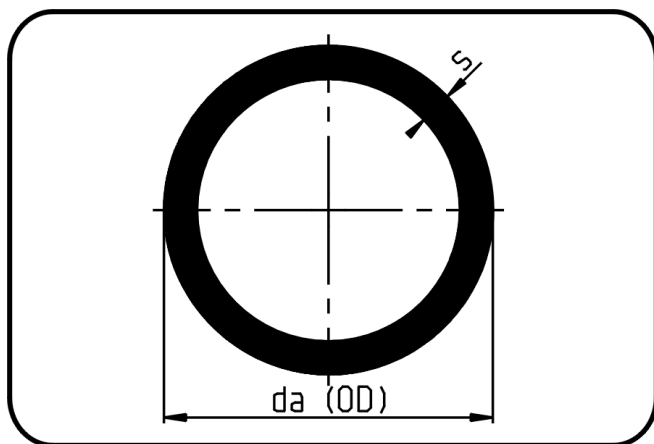

Code: 12.705

- Pipe 5m
- extruded
- PPH grey

| Dimension | Code           | Detail                  | da(OD)<br>mm | s<br>mm | Weight |
|-----------|----------------|-------------------------|--------------|---------|--------|
| 200       | 12.705.0200.00 | 200X3,0 Ventilation     | 200          | 3       | 1.83   |
| 250       | 12.705.0250.00 | 250X3,5 Ventilation     | 250          | 3,5     | 2.66   |
| 315       | 12.705.0315.00 | 315X5,0 Ventilation     | 315          | 5       | 4.74   |
| 355       | 12.705.0355.00 | 355X6,0 Ventilation     | 355          | 6       | 6.39   |
| 400       | 12.705.0400.00 | 400X6,0 Ventilation     | 400          | 6       | 7.20   |
| 450       | 12.705.0450.00 | 450X6,0 Ventilation     | 450          | 6       | 8.10   |
| 500       | 12.705.0500.00 | 500X8,0 Ventilation     | 500          | 8       | 11.90  |
| 560       | 12.705.0560.00 | 560X8,0 Ventilation     | 560          | 8       | 13.41  |
| 630       | 12.705.0630.00 | 630X10,0 Ventilation    | 630          | 10      | 18.80  |
| 710       | 12.705.0710.00 | 710X12,0 Ventilation    | 710          | 12      | 25.30  |
| 800       | 12.705.0800.00 | 800X12,0 Ventilation    | 800          | 12      | 28.60  |
| 900       | 12.705.0900.00 | 900X15,0 Ventilation    | 900          | 15      | 40.10  |
| 1000      | 12.705.1000.00 | 1000X15,0 Ventilation   | 1.000        | 15      | 44.60  |
| 1200      | 12.705.1200.00 | 1200X18,0 Ventilation   | 1.200        | 18      | 64.10  |
| 1400      | 12.705.1400.00 | 1400X20,0 Ventilation   | 1.400        | 20      | 83.20  |
| 110       | 12.705.0110.41 | 110X2,7 SDR41 ISO S-20  | 110          | 2,7     | 0.90   |
| 125       | 12.705.0125.41 | 125X3,1 SDR41 ISO S-20  | 125          | 3,1     | 1.17   |
| 140       | 12.705.0140.41 | 140X3,5 SDR41 ISO S-20  | 140          | 3,5     | 1.48   |
| 160       | 12.705.0160.41 | 160X4,0 SDR41 ISO S-20  | 160          | 4       | 1.91   |
| 180       | 12.705.0180.41 | 180X4,4 SDR41 ISO S-20  | 180          | 4,4     | 2.36   |
| 200       | 12.705.0200.41 | 200X4,9 SDR41 ISO S-20  | 200          | 4,9     | 2.92   |
| 225       | 12.705.0225.41 | 225X5,5 SDR41 ISO S-20  | 225          | 5,5     | 3.70   |
| 250       | 12.705.0250.41 | 250X6,2 SDR41 ISO S-20  | 250          | 6,2     | 4.59   |
| 280       | 12.705.0280.41 | 280X6,9 SDR41 ISO S-20  | 280          | 6,9     | 5.73   |
| 315       | 12.705.0315.41 | 315X7,7 SDR41 ISO S-20  | 315          | 7,7     | 7.19   |
| 355       | 12.705.0355.41 | 355X8,7 SDR41 ISO S-20  | 355          | 8,7     | 9.14   |
| 400       | 12.705.0400.41 | 400X9,8 SDR41 ISO S-20  | 400          | 9,8     | 11.60  |
| 450       | 12.705.0450.41 | 450X11,0 SDR41 ISO S-20 | 450          | 11      | 14.60  |
|           |                |                         |              |         |        |

| Dimension | Code           | Detail                    | da(OD)<br>mm | s<br>mm | Weight |
|-----------|----------------|---------------------------|--------------|---------|--------|
| 500       | 12.705.0500.41 | 500X12,3 SDR41 ISO S-20   | 500          | 12,3    | 18.10  |
| 560       | 12.705.0560.41 | 560X13,7 SDR41 ISO S-20   | 560          | 13,7    | 22.60  |
| 630       | 12.705.0630.41 | 630X15,4 SDR41 ISO S-20   | 630          | 15,4    | 28.50  |
| 710       | 12.705.0710.41 | 710X17,4 SDR41 ISO S-20   | 710          | 17,4    | 36.30  |
| 800       | 12.705.0800.41 | 800X19,6 SDR41 ISO S-20   | 800          | 19,6    | 46.10  |
| 900       | 12.705.0900.41 | 900X22,0 SDR41 ISO S-20   | 900          | 22      | 58.10  |
| 1000      | 12.705.1000.41 | 1000X24,5 SDR41 ISO S-20  | 1.000        | 24,5    | 72.00  |
| 1200      | 12.705.1200.41 | 1200X29,4 SDR41 ISO S-20  | 1.200        | 29,4    | 103.00 |
| 1400      | 12.705.1400.41 | 1400X34,3 SDR41 ISO S-20  | 1.400        | 34,3    | 141.00 |
| 75        | 12.705.0075.33 | 75X2,3 SDR33 ISO S-16     | 75           | 2,3     | 0.52   |
| 90        | 12.705.0090.33 | 90X2,8 SDR33 ISO S-16     | 90           | 2,8     | 0.76   |
| 110       | 12.705.0110.33 | 110X3,4 SDR33 ISO S-16    | 110          | 3,4     | 1.11   |
| 125       | 12.705.0125.33 | 125X3,9 SDR33 ISO S-16    | 125          | 3,9     | 1.45   |
| 140       | 12.705.0140.33 | 140X4,3 SDR33 ISO S-16    | 140          | 4,3     | 1.78   |
| 160       | 12.705.0160.33 | 160X4,9 SDR33 ISO S-16    | 160          | 4,9     | 2.32   |
| 180       | 12.705.0180.33 | 180X5,5 SDR33 ISO S-16    | 180          | 5,5     | 2.94   |
| 200       | 12.705.0200.33 | 200X6,2 SDR33 ISO S-16    | 200          | 6,2     | 3.65   |
| 225       | 12.705.0225.33 | 225X6,9 SDR33 ISO S-16    | 225          | 6,9     | 4.57   |
| 250       | 12.705.0250.33 | 250X7,7 SDR33 ISO S-16    | 250          | 7,7     | 5.67   |
| 280       | 12.705.0280.33 | 280X8,6 SDR33 ISO S-16    | 280          | 8,6     | 7.09   |
| 315       | 12.705.0315.33 | 315X9,7 SDR33 ISO S-16    | 315          | 9,7     | 8.97   |
| 355       | 12.705.0355.33 | 355X10,9 SDR33 ISO S-16   | 355          | 10,9    | 11.30  |
| 400       | 12.705.0400.33 | 400X12,3 SDR33 ISO S-16   | 400          | 12,3    | 14.40  |
| 450       | 12.705.0450.33 | 450X13,8 SDR33 ISO S-16   | 450          | 13,8    | 18.20  |
| 500       | 12.705.0500.33 | 500X15,3 SDR33 ISO S-16   | 500          | 15,3    | 22.30  |
| 560       | 12.705.0560.33 | 560X17,2 SDR33 ISO S-16   | 560          | 17,2    | 28.10  |
| 630       | 12.705.0630.33 | 630X19,3 SDR33 ISO S-16   | 630          | 19,3    | 35.50  |
| 710       | 12.705.0710.33 | 710X21,8 SDR33 ISO S-16   | 710          | 21,8    | 45.20  |
| 800       | 12.705.0800.33 | 800X24,5 SDR33 ISO S-16   | 800          | 24,5    | 57.20  |
| 900       | 12.705.0900.33 | 900X27,6 SDR33 ISO S-16   | 900          | 27,6    | 72.50  |
| 1000      | 12.705.1000.33 | 1000X30,6 SDR33 ISO S-16  | 1.000        | 30,6    | 89.20  |
| 1200      | 12.705.1200.33 | 1200X36,7 SDR33 ISO S-16  | 1.200        | 36,7    | 128.00 |
| 40        | 12.705.0040.26 | 40X1,8 SDR26 ISO S-12,5   | 40           | 1,8     | 0.22   |
| 50        | 12.705.0050.26 | 50X2,0 SDR26 ISO S-12,5   | 50           | 2       | 0.30   |
| 63        | 12.705.0063.26 | 63X2,5 SDR26 ISO S-12,5   | 63           | 2,5     | 0.47   |
| 75        | 12.705.0075.26 | 75X2,9 SDR26 ISO S-12,5   | 75           | 2,9     | 0.65   |
| 90        | 12.705.0090.26 | 90X3,5 SDR26 ISO S-12,5   | 90           | 3,5     | 0.94   |
| 110       | 12.705.0110.26 | 110X4,2 SDR26 ISO S-12,5  | 110          | 4,2     | 1.36   |
| 125       | 12.705.0125.26 | 125X4,8 SDR26 ISO S-12,5  | 125          | 4,8     | 1.76   |
| 140       | 12.705.0140.26 | 140X5,4 SDR26 ISO S-12,5  | 140          | 5,4     | 2.21   |
| 160       | 12.705.0160.26 | 160X6,2 SDR26 ISO S-12,5  | 160          | 6,2     | 2.89   |
| 180       | 12.705.0180.26 | 180X6,9 SDR26 ISO S-12,5  | 180          | 6,9     | 3.63   |
| 200       | 12.705.0200.26 | 200X7,7 SDR26 ISO S-12,5  | 200          | 7,7     | 4.50   |
| 225       | 12.705.0225.26 | 225X8,6 SDR26 ISO S-12,5  | 225          | 8,6     | 5.65   |
| 250       | 12.705.0250.26 | 250X9,6 SDR26 ISO S-12,5  | 250          | 9,6     | 6.99   |
| 280       | 12.705.0280.26 | 280X10,7 SDR26 ISO S-12,5 | 280          | 10,7    | 8.72   |
|           |                |                           |              |         |        |

| Dimension | Code           | Detail                     | da(OD)<br>mm | s<br>mm | Weight |
|-----------|----------------|----------------------------|--------------|---------|--------|
| 315       | 12.705.0315.26 | 315X12,1 SDR26 ISO S-12,5  | 315          | 12,1    | 11.10  |
| 355       | 12.705.0355.26 | 355X13,6 SDR26 ISO S-12,5  | 355          | 13,6    | 14.00  |
| 400       | 12.705.0400.26 | 400X15,3 SDR26 ISO S-12,5  | 400          | 15,3    | 17.70  |
| 450       | 12.705.0450.26 | 450X17,2 SDR26 ISO S-12,5  | 450          | 17,2    | 22.40  |
| 500       | 12.705.0500.26 | 500X19,1 SDR26 ISO S-12,5  | 500          | 19,1    | 27.60  |
| 560       | 12.705.0560.26 | 560X21,4 SDR26 ISO S-12,5  | 560          | 21,4    | 34.60  |
| 630       | 12.705.0630.26 | 630X24,1 SDR26 ISO S-12,5  | 630          | 24,1    | 43.90  |
| 710       | 12.705.0710.26 | 710X27,2 SDR26 ISO S-12,5  | 710          | 27,2    | 55.80  |
| 800       | 12.705.0800.26 | 800X30,6 SDR26 ISO S-12,5  | 800          | 30,6    | 70.80  |
| 900       | 12.705.0900.26 | 900X34,4 SDR26 ISO S-12,5  | 900          | 34,4    | 89.40  |
| 32        | 12.705.0032.17 | 32X1,9 SDR17,6 ISO S-8,3   | 32           | 1,9     | 0.18   |
| 40        | 12.705.0040.17 | 40X2,3 SDR17,6 ISO S-8,3   | 40           | 2,3     | 0.27   |
| 50        | 12.705.0050.17 | 50X2,9 SDR17,6 ISO S-8,3   | 50           | 2,9     | 0.42   |
| 63        | 12.705.0063.17 | 63X3,6 SDR17,6 ISO S-8,3   | 63           | 3,6     | 0.66   |
| 75        | 12.705.0075.17 | 75X4,3 SDR17,6 ISO S-8,3   | 75           | 4,3     | 0.93   |
| 90        | 12.705.0090.17 | 90X5,1 SDR17,6 ISO S-8,3   | 90           | 5,1     | 1.32   |
| 110       | 12.705.0110.17 | 110X6,3 SDR17,6 ISO S-8,3  | 110          | 6,3     | 1.98   |
| 125       | 12.705.0125.17 | 125X7,1 SDR17,6 ISO S-8,3  | 125          | 7,1     | 2.54   |
| 140       | 12.705.0140.17 | 140X8,0 SDR17,6 ISO S-8,3  | 140          | 8       | 3.20   |
| 160       | 12.705.0160.17 | 160X9,1 SDR17,6 ISO S-8,3  | 160          | 9,1     | 4.15   |
| 180       | 12.705.0180.17 | 180X10,2 SDR17,6 ISO S-8,3 | 180          | 10,2    | 5.22   |
| 200       | 12.705.0200.17 | 200X11,4 SDR17,6 ISO S-8,3 | 200          | 11,4    | 6.47   |
| 225       | 12.705.0225.17 | 225X12,8 SDR17,6 ISO S-8,3 | 225          | 12,8    | 8.19   |
| 250       | 12.705.0250.17 | 250X14,2 SDR17,6 ISO S-8,3 | 250          | 14,2    | 10.10  |
| 280       | 12.705.0280.17 | 280X15,9 SDR17,6 ISO S-8,3 | 280          | 15,9    | 12.60  |
| 315       | 12.705.0315.17 | 315X17,9 SDR17,6 ISO S-8,3 | 315          | 17,9    | 16.00  |
| 355       | 12.705.0355.17 | 355X20,1 SDR17,6 ISO S-8,3 | 355          | 20,1    | 20.20  |
| 400       | 12.705.0400.17 | 400X22,7 SDR17,6 ISO S-8,3 | 400          | 22,7    | 25.70  |
| 450       | 12.705.0450.17 | 450X25,5 SDR17,6 ISO S-8,3 | 450          | 25,5    | 32.50  |
| 500       | 12.705.0500.17 | 500X28,3 SDR17,6 ISO S-8,3 | 500          | 28,3    | 40.10  |
| 560       | 12.705.0560.17 | 560X31,7 SDR17,6 ISO S-8,3 | 560          | 31,7    | 50.30  |
| 630       | 12.705.0630.17 | 630X35,7 SDR17,6 ISO S-8,3 | 630          | 35,7    | 63.70  |
| 16        | 12.705.0016.11 | 16X1,8 SDR11 ISO S-5       | 16           | 1,8     | 0.08   |
| 20        | 12.705.0020.11 | 20X1,9 SDR11 ISO S-5       | 20           | 1,9     | 0.11   |
| 25        | 12.705.0025.11 | 25X2,3 SDR11 ISO S-5       | 25           | 2,3     | 0.16   |
| 32        | 12.705.0032.11 | 32X2,9 SDR11 ISO S-5       | 32           | 2,9     | 0.26   |
| 40        | 12.705.0040.11 | 40X3,7 SDR11 ISO S-5       | 40           | 3,7     | 0.41   |
| 50        | 12.705.0050.11 | 50X4,6 SDR11 ISO S-5       | 50           | 4,6     | 0.64   |
| 63        | 12.705.0063.11 | 63X5,8 SDR11 ISO S-5       | 63           | 5,8     | 1.01   |
| 75        | 12.705.0075.11 | 75X6,8 SDR11 ISO S-5       | 75           | 6,8     | 1.40   |
| 90        | 12.705.0090.11 | 90X8,2 SDR11 ISO S-5       | 90           | 8,2     | 2.03   |
| 110       | 12.705.0110.11 | 110X10,0 SDR11 ISO S-5     | 110          | 10      | 3.01   |
| 125       | 12.705.0125.11 | 125X11,4 SDR11 ISO S-5     | 125          | 11,4    | 3.91   |
| 140       | 12.705.0140.11 | 140X12,7 SDR11 ISO S-5     | 140          | 12,7    | 4.87   |
| 160       | 12.705.0160.11 | 160X14,6 SDR11 ISO S-5     | 160          | 14,6    | 6.39   |
| 180       | 12.705.0180.11 | 180X16,4 SDR11 ISO S-5     | 180          | 16,4    | 8.07   |
|           |                |                            |              |         |        |

| Dimension | Code           | Detail                  | da(OD)<br>mm | s<br>mm | Weight |
|-----------|----------------|-------------------------|--------------|---------|--------|
| 200       | 12.705.0200.11 | 200X18,2 SDR11 ISO S-5  | 200          | 18,2    | 9.95   |
| 225       | 12.705.0225.11 | 225X20,5 SDR11 ISO S-5  | 225          | 20,5    | 12.59  |
| 250       | 12.705.0250.11 | 250X22,7 SDR11 ISO S-5  | 250          | 22,7    | 15.48  |
| 280       | 12.705.0280.11 | 280X25,4 SDR11 ISO S-5  | 280          | 25,4    | 19.40  |
| 315       | 12.705.0315.11 | 315X28,6 SDR11 ISO S-5  | 315          | 28,6    | 24.55  |
| 12        | 12.705.0012.07 | 12X1,8 SDR7,4 ISO S-3,2 | 12           | 1,8     | 0.06   |