


Saddles

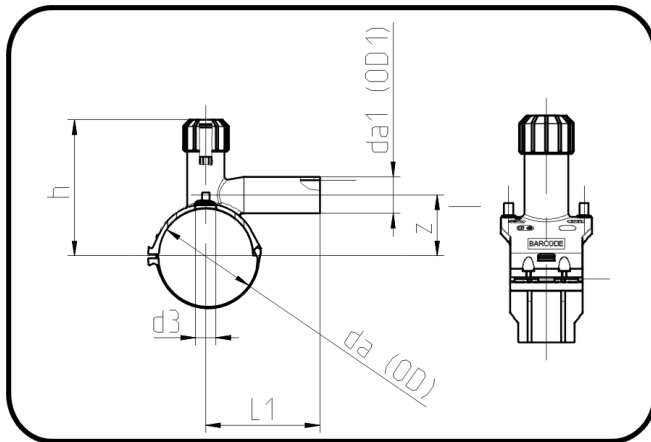

Code: 278

- Tapping Saddle with screw cap
- gastight-bottom part screwable
- injection moulded
- **Electro-fusion**
- **PE 100-RC black**

Availability and minimum order quantity on request.

Dimension	Code	Detail	da(OD) mm	da1(OD1) mm	z mm	L1 mm	d3 mm	h mm	Weight
40/25	70.278.4025.11	40/25 SDR11 ISO S-5	40	25	36	110	16	103	0.11
63/40	70.278.6340.11	63/40 SDR11 ISO S-5	63	40	58,5	141	26	169,5	0.58
90/20	70.278.9020.11	90/20 SDR 17 - 11	90	20	67	120	32	196,5	0.73
90/25	70.278.9025.11	90/25 SDR 17 - 11	90	25	67	125	32	196,5	0.74
90/40	70.278.9040.11	90/40 SDR 17 - 11	90	40	67	150	32	196,5	0.77
125/20	70.278.1220.11	125/20 SDR 17 - 11	125	20	82	120	32	214	0.81
125/40	70.278.1240.11	125/40 SDR 17 - 11	125	40	82	151	32	214	0.85
160/20	70.278.1620.11	160/20 SDR 17 - 11	160	20	98,5	121	32	231,5	0.85
160/25	70.278.1625.11	160/25 SDR 17 - 11	160	25	99	125	32	231,5	0.89
160/40	70.278.1640.11	160/40 SDR 17 - 11	160	40	103,5	148	32	231,5	0.89
180/25	70.278.1825.11	180/25 SDR 17 - 11	180	25	115	125	32	241,5	0.94
200/20	70.278.2020.11	200/20 SDR 17 - 11	200	20	116	120	32	251,5	0.99
200/25	70.278.2025.11	200/25 SDR 17 - 11	200	25	117	125	32	251,5	0.95
200/40	70.278.2040.11	200/40 SDR 17 - 11	200	40	118	158	32	251,5	1.04
225/25	70.278.2225.11	225/25 SDR 17 - 11	225	25	138,5	125	32	297	1.16
250/32	70.278.2532.11	250/32 SDR 17 - 11	250	32	151	130	32	297	1.04