


## Saddles

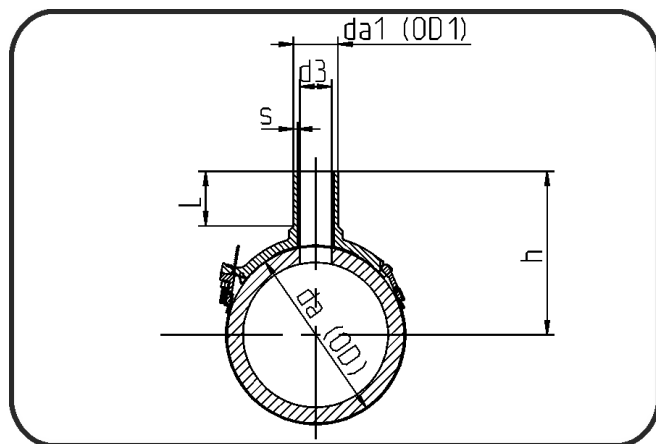

Code: 288

- Spigot saddle
- MOP water 16bar/gas 10bar
- W/P-TW
- injection moulded
- **Electro-fusion**
- **PE 100-RC black**

Availability and minimum order quantity on request.

| Dimension | Code           | Detail              | da(OD)<br>mm | da1(OD1)<br>mm | d3<br>mm | s<br>mm | L<br>mm | Weight |
|-----------|----------------|---------------------|--------------|----------------|----------|---------|---------|--------|
| 90/20     | 70.288.9020.11 | 90/20 SDR 17 - 11   | 90           | 20             | 12       | 3       | 56      | 0.18   |
| 90/40     | 70.288.9040.11 | 90/40 SDR 17 - 11   | 90           | 40             | 32       | 3,7     | 64      | 0.29   |
| 110/20    | 70.288.1120.11 | 110/20 SDR 17 - 11  | 110          | 20             | 12       | 3       | 56      | 0.20   |
| 110/40    | 70.288.1140.11 | 110/40 SDR 17 - 11  | 110          | 40             | 31       | 3,7     | 64      | 0.22   |
| 125/20    | 70.288.1220.11 | 125/20 SDR 17 - 11  | 125          | 20             | 12       | 3       | 56      | 0.22   |
| 125/40    | 70.288.1240.11 | 125/40 SDR 17 - 11  | 125          | 40             | 32       | 3,7     | 64      | 0.24   |
| 140/20    | 70.288.1420.11 | 140/20 SDR 17 - 11  | 140          | 20             | 12       | 3       | 56      | 0.22   |
| 140/40    | 70.288.1440.11 | 140/40 SDR 17 - 11  | 140          | 40             | 32       | 3,7     | 64      | 0.37   |
| 160/40    | 70.288.1640.11 | 160/40 SDR 17 - 11  | 160          | 40             | 31       | 3,7     | 64      | 0.43   |
| 160/50    | 70.288.1650.11 | 160/50 SDR 17 - 11  | 160          | 50             | 36       | 4,6     | 71      | 0.49   |
| 180/40    | 70.288.1840.11 | 180/40 SDR 17 - 11  | 180          | 40             | 31       | 3,7     | 64      | 0.48   |
| 180/50    | 70.288.1850.11 | 180/50 SDR 17 - 11  | 180          | 50             | 36       | 4,6     | 71      | 0.57   |
| 180/90    | 70.288.1890.11 | 180/90 SDR 17 - 11  | 180          | 90             | 65       | 8,2     | 92      | 1.01   |
| 180/110   | 70.288.1811.11 | 180/110 SDR 17 - 11 | 180          | 110            | 84       | 10      | 98      | 1.10   |
| 200/20    | 70.288.2020.11 | 200/20 SDR 17 - 11  | 200          | 20             | 12       | 3       | 56      | 0.27   |
| 200/40    | 70.288.2040.11 | 200/40 SDR 17 - 11  | 200          | 40             | 32       | 3,7     | 64      | 0.28   |
| 225/40    | 70.288.2240.11 | 225/40 SDR 17 - 11  | 225          | 40             | 31       | 3,7     | 64      | 0.47   |
| 225/50    | 70.288.2250.11 | 225/50 SDR 17 - 11  | 225          | 50             | 36       | 4,6     | 71      | 0.53   |
| 250/50    | 70.288.2550.11 | 250/50 SDR 17 - 11  | 250          | 50             | 36       | 4,6     | 72      | 0.38   |
| 250/75    | 70.288.2575.11 | 250/75 SDR 17 - 11  | 250          | 75             | 55       | 6,8     | 86      | 0.73   |
| 250/90    | 70.288.2590.11 | 250/90 SDR 17 - 11  | 250          | 90             | 65       | 8,2     | 92      | 0.99   |
| 280/50    | 70.288.2850.11 | 280/50 SDR 17 - 11  | 280          | 50             | 45       | 4,6     | 72      | 0.38   |
| 280/63    | 70.288.2863.11 | 280/63 SDR 17 - 11  | 280          | 63             | 45       | 5,8     | 77      | 0.55   |
| 280/90    | 70.288.2890.11 | 280/90 SDR 17 - 11  | 280          | 90             | 65       | 8,2     | 92      | 1.04   |
| 280/110   | 70.288.2811.11 | 280/110 SDR 17 - 11 | 280          | 110            | 84       | 10      | 98      | 1.07   |
| 355/63    | 70.288.3563.11 | 355/63 SDR 17 - 11  | 355          | 63             | 45       | 5,8     | 77      | 0.62   |
| 355/90    | 70.288.3590.11 | 355/90 SDR 17 - 11  | 355          | 90             | 65       | 8,2     | 92      | 1.06   |

| Dimension | Code           | Detail              | da(OD)<br>mm | da1(OD1)<br>mm | d3<br>mm | s<br>mm | L<br>mm | Weight |
|-----------|----------------|---------------------|--------------|----------------|----------|---------|---------|--------|
| 355/110   | 70.288.3511.11 | 355/110 SDR 17 - 11 | 355          | 110            | 84       | 10      | 98      | 1.19   |